


Technical Coating Data

Interiorcoating

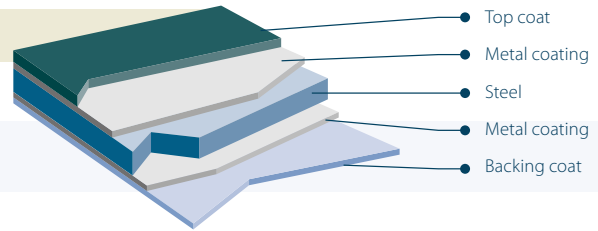

Basic coating for indoor building applications only.

Technical information

Thickness*		15 microns
Composition	Front	15 microns top coat
	Back	7 microns backing coat
Gloss*		30 GU
Appearance		Smooth

Performance

Adhesion of the coating (T-bend)		≤ 2 T
Resistance to cracking on bending (T-bend)		≤ 3 T
Impact resistance		15 J
Clemen scratch resistance		≥ 1 kg
Surface "pencil" hardness		HB to H
Condensation resistance:	QCT test	500 hours
	Salt spray test	150 hours
Internal environment classification		CPI2
Fire behaviour classification (EN 13501-1)		A1

These performance characteristics refer specifically to metallic coating Z100 and Optigal™ ZM60 (guaranteed minimum).

Benefits**

- Thermosetting paint
- Surface treatment and paint: free of hexavalent chromium and heavy metals

* Nominal value, tolerance according to EN 10169.

** For more informations, please contact our sales department.